

# Commercial GEAR

**LASER®**

JULY - OCT 2025 ISSUE 3

## Bush Tool Spring Suspension

**7432**

For bushes in HGV spring suspension, supplied with a 12 tonne hydraulic cylinder suitable for use on the vehicle.

- For installation and removal of slotted bushes on HGV spring suspension.
- Includes a 12 tonne hydraulic cylinder (supplied without hydraulic pump).
- Installation protects the bush using the parallel working tension elements.
- Suitable for on-vehicle use.

Designed to be used with hydraulic rams for bodywork, bush and bearing presses

PRODUCT VIDEO



## Hydraulic Pumps

### Air Powered Hydraulic Pump

700 bar

**7862**

Foot operated air powered hydraulic pump connects to workshop airline and delivers up to 700 bar (10,000psi) pressure.

- Durable, compact design (242 x 127 x 204mm), with pedal control. Hose length: 1.8m, fitted with 3/8" NPT hydraulic couplings.

### Hydraulic Two Speed Hand Pump

700 bar

**7861**

Manually operated pump delivers up to 700 bar (10,000psi) pressure. Can be used in either vertical or horizontal positions.

- Durable steel bodied design (530 x 135 x 155mm), with simple to use hand pump. Hose length: 1.8m, fitted with 3/8" NPT hydraulic couplings.



## Jumbo Pry Bar 36"

**3206**

Extra long pry bar, manufactured from chrome molybdenum for extra strength.

- Blade Length: 710mm, overall length: 900mm (36"), blade width: 25mm.

More **Laser HGV Tools** Inside...



**Air Tools  
& Accessories**

p.2



**EV Insulated  
Hand Tools & Kits**

p.4

**AdBlue® Pumps  
& Accessories**



p.5



**NEW**



## Compact Swirl Cleaning Gun with Vacuum Extraction

9202

Ideal for cleaning upholstery, interior & exterior trim edges, & engine bay detailing.



Creates a Vortex stream of air

- Supplied with a 300cc cleaning solution/ water bottle & vacuum cleaner adaptors.
- NOTE: Requires the use of a wet & dry vacuum cleaner.
- Equipped with 360° rotating 1/4" BSP inlet for workshop air to ensure maximum freedom of movement.



PRODUCT VIDEO



## Air Impact Wrench 1"D with 6" Anvil

9024

Air impact wrench, with extended anvil (output shaft) for recessed wheel nut access and user convenience. Also much lighter in weight than other industry models. These features make it much more user friendly, and less tiring to use, ensuring optimum health and safety for the worker. Ideal solution in HGV wheel replacement, vehicle repair, fleet maintenance, heavy plant, construction and agriculture.

- 2170Nm maximum torque, with an unrivalled nut busting 3526Nm & 7,000 RPM.



## 5-in-1 Air Tool Kit

9010

A unique set that uses just one air motor to power 5 different "heads". The innovative but secure quick release system allows the heads to be changed in seconds to do 5 completely different tasks.

### Heads include:

- 1/2" drive ratchet head.
- Angle grinder head.
- Inline die grinder head.
- Angled dies grinder head.
- Air drill head.



PRODUCT VIDEO



**NEW**



## Ball Joint Separator

Pneumatic Impact Set 11pc

9183

Makes separating ball joints easy.

The separator adaptors screw-in, in place of the joint nut and bottom out on the end of the joint thread, allowing an air impact hammer to be used to quickly vibrate the joint taper free.

- Sizes: M10 x 1.25, M10 x 1.5, M12 x 1.25, M12 x 1.5, M12 x 1.75, M14 x 1.5, M14 x 2.0, M16 x 1.5mm. 2x air hammer punches. 1x 17mm hex punch to align the impact gun where required. Domed adaptor to allow controlled off-line use.



## Air Hammer

6031

Professional quality air hammer with variable speed trigger, built in power regulator and quick-change chuck.

- 2200 blows per minute (bpm).
- Stroke length 98mm.
- Air hose size 3/8" ID; air inlet size 1/4" BSP; average air consumption 4.0cfm.



## Impact Wrenches

### Impact Wrench 1/2"D

5585

A composite bodied, high torque, twin hammer air impact wrench with handle mounted air exhaust to improve user comfort.

- Composite handle exhaust/twin hammer with 10,000rpm (free speed).
- Forward 3 speed, reverse 2 speed. Max torque 1356Nm/1000 ftlbs, Working torque 950Nm-1020Nm.
- Air pressure 90psi, air consumption 5.4cfm.



### Impact Wrench 3/4"D

Twin Hammer 146mm Long

7680

Small & lightweight but powerful impact wrench, with maximum torque 1100lb-ft (1492Nm).

- One-piece Aluminium alloy die casting housing with black grip handle and 3/4" Drive.
- 9000rpm with a working Torque of 271-1220Nm.
- Weight 1.9kg. Air inlet 1/4" with suggested hose size of 10mm. Bolt capacity 23mm.



### Air Palm Impact Wrench 1/2"D

8497

A lightweight mini air impact wrench, that fits in the palm of the hand, making it suitable for use in tight spaces such as in engine bays, under wheel arches and around brake calipers.

- Side mounted trigger. Suitable for left & right handers.
- Features swivel connector with 360° rotation.
- Length: 88mm; maximum torque: 542Nm (400lb-ft). Weight: 1.15kg.





## Air Hammer Drift Set

Extra Long

**6097**

Extra long air impact drift set, ideal for removing corroded bolts etc. in suspension work.

- **Contents:** 6 x Parallel drift. Sizes 5.2, 6.5, 6.9, 7.7, 9.3 and 12.7mm.
- **Length:** 177mm.



## Impact Extension Bar Sets

Impact extension bars to provide access to difficult to reach fixings. Suitable for use with an air impact wrench and ideal for commercial vehicle maintenance and other heavy-duty applications.

- **Lengths:** 100, 150 and 300mm.

| Code        | Drive |
|-------------|-------|
| <b>8365</b> | 3/4"D |
| <b>8600</b> | 1"D   |



## Air Coupling Kit 110pc

**30949**

### Kit Contains -

- 15 x Standard Female Adaptor 1/4" BSPP
- 20 x Standard Male Adaptor 1/4" BSPT
- 10 x Airflow Female Coupling 1/4" BSPP
- 10 x Airflow Male Coupling 1/4" BSPT
- 15 x Reducing Bush Fitting 1/4" BSPP to 1/2" BSPT Male
- 10 x Double Union Nut 1/4" BSPP
- 10 x Hose Tail Adaptor 1/4" BSPP Male with 1/4" Hose Tail & 3/8" Hose Tail 10 x Hose Connectors 1/4" to 1/4"



## Deep Impact Sockets

### Deep Impact Socket Set 3/4"D 9pc

**6409**

This 9 piece set covers a range of larger sizes from 30mm to 46mm designed for commercial vehicle maintenance and servicing. The generous 90mm socket depth is particularly useful when access is limited.

- **Socket sizes:** 30, 32, 33, 34, 35, 36, 38, 41 and 46mm.



### Extra Deep Impact Socket Set 3/4"D 7pc

**6410**

Heavy-duty socket set featuring an extra-deep design and Bi-Hex (12-point) profile. Covers larger sizes from 24mm to 36mm, ideal for commercial vehicle maintenance and servicing.

- **Socket sizes:** 24, 27, 30, 32, 34 and 36mm.



## Auto-Rewind Air Hose Reel 15m

**8864**

A retractable 15m workshop airline hose, with 3/8" (10mm) internal diameter and fitted with 1/4" BSP couplings, in a wall mounted housing. It features an auto-stop function, allowing for the hose to be extended and stopped at any length, together with an auto-retract function which guides the hose smoothly and neatly back into the housing.


- The high-visibility hose has a PVC/rubber construction and is silicone free, making it ideal for use in a bodyshop.
- Working pressure: 150psi. Burst pressure: 450 psi.



## Flexible Air Hose

- Ultra-flexible, silicone-free polymer hose that lies flat and resists oil, UV, and weathering. Rated to 300psi working pressure (900psi burst) and -40°C to +60°C.

| Code        | Description                            |
|-------------|--|
| <b>6653</b> | Flexible Air Hose 13mm x 15m - Yellow  |
| <b>6417</b> | Flexible Air Hose 9.5mm x 15m - Blue   |
| <b>6418</b> | Flexible Air Hose 9.5mm x 15m - Yellow |

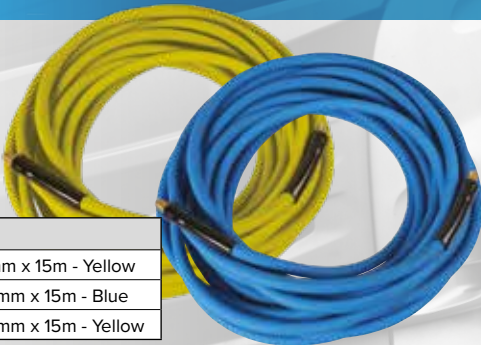

## Air Duster Blow Gun

**7466**

Air duster blow gun supplied with hose swivel coupler and T-connector. Designed for use in HGV cabs.

- 5m air coiled hose (6mm diameter) with swivel connector.
- T-shaped connector with bronze ball shut-off valve quick connector and two 6mm push fit connectors.
- Maximum pressure: 140psi.



## Airtool & Socket Organisier Magnetic

**3890**

A strong magnet allows secure attachment to tool cabinets, while integrated storage for popular wheel nut removers keeps the rattle gun and accessories easily accessible.

- Holds 4 wheel nut sockets and air wrench.
- Especially useful in tyre and exhaust fitting bays.





# Insulated Tools

## Spark Resistant Fully Insulated Tool Kit 24pc

8509

Essential for working on any live high voltage applications where flammable gases may also be present. Manufactured from hard wearing Beryllium Copper which, unlike steel tools, will not spark if struck or dropped.

- Spark-resistant tools manufactured exclusively from Beryllium Copper (BeCu).
- Fully insulated for safe operator use for live voltages up to 1000V AC and 1500V DC (IEC60900:2018 approved).
- Applications include hydrogen powered EV's (battery electric vehicles), oil and gas refineries, nuclear power plants and similar areas where flammable gases may be present.
- Set includes open end wrenches 10-19mm, 1/2"D sockets 10-19mm, 1/2"D T-handle, 8 inch pliers, 6 inch side cutters and 7 assorted screwdrivers.



| Code | Torque Range | Length |
|------|--------------|--------|
| 8774 | 5 - 25Nm     | 310mm  |
| 8775 | 20 - 100Nm   | 395mm  |

## Insulated Torque Wrench 3/8"D

A fully insulated click type 3/8"D torque wrench, featuring an easy to read scale, is adjusted by a pull-out collar at the base of the handle in 0.5Nm increments.

- Supplied in a storage case.



## VDE Insulated Torque Screwdriver Set 1-6Nm 9pc

9167

A slipper style torque screwdriver. The range of 1-6Nm is adjusted by a pull-down collar at the base of the handle in 0.1Nm increments.

- Fully insulated fast change interchangeable adaptors: 4x Slotted (3.0, 4.0, 5.5 & 6.5mm), 1x Ph1, 1x Ph2, 1x Pz1, 1x Pz2.



NEW

## Non-Conductive Insulated Magnetic 1/4" Hex Bit Driver

9152

Unique non-conductive adaptor that allows a 1/4" drive bit driver or drill driver to be used with 1/4" hex bits. There is no metal to metal contact between the ends isolating the driver.



NEW

## Insulated Cable Knife with Ceramic Blade

9164

A fully insulated cable knife with non-conductive ceramic blade. Ideal for cable preparation prior to crimping etc.



## Insulated Junior Hacksaw - 1000V Safe

9165

A fully insulated junior hacksaw handle and frame, 1000V safe. (NOTE: metal blade not insulated). Manufactured to IEC60900 standards, for safe operator use on live circuits up to 1000V AC and 1500V DC.

## Insulated Hammer with Replaceable Inserts

9166

A fully insulated hammer, 1000V safe, with replaceable head inserts. Manufactured to IEC60900 standards, for safe operator use on live circuits up to 1000V AC and 1500V DC.



## Insulated Tool Kit 3 Drawer Toolbox 27pc

8328

Robust 3 drawer tool box containing a selection of fully insulated tools to suit the needs of any mechanic working on hybrid and electric vehicles, or electricians.

- Combination pliers & side cutters.
- 2 x screwdrivers. 5 x insulated open ended spanners: 8 - 17mm.
- 3/8"D ratchet & sockets: 7 - 22mm & 100mm extension bar.
- Cable knife & 420mm long flexible magnetic pick up tool.
- CAT IV 1000V voltage tester to check for the existence &/ or absence of high-voltage on hybrid & electric vehicles.




## Insulated Tool Kit 3/8"D 50pc

7383

This fully insulated tool kit is suitable for use on hybrid and electrical vehicles and are encased to prevent touching any exposed metal whilst working, reducing the risk of electrocution from live circuits up to 1000V AC or 1500V DC.

- Kit contains: 22pc 3/8"D socket set complete with extension bars, spline bits and ratchet, an 11pc screwdriver set, 6pc plier set, plus 10 protective sleeves and a cable stripping knife.

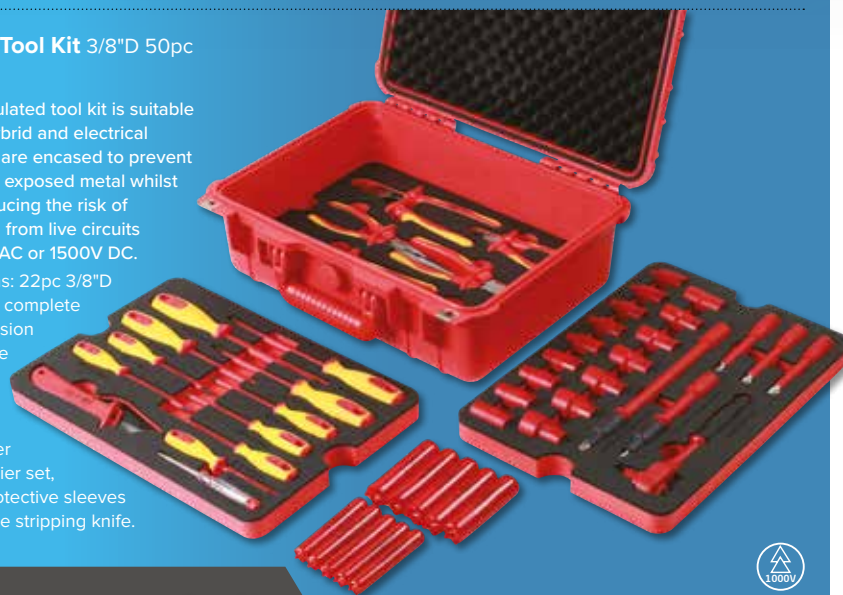



## AdBlue® Transport Tank 75L 12V 7115

A free standing and fully mobile 75 litre AdBlue® tank, supplied complete with its own 12V powered delivery pump, delivery hose and auto shutoff delivery valve.



- Pump capable of delivering up to 17L/min. Working pressure: 40psi.
- 4m long EPDM delivery hose with auto shut-off nozzle.

### PRODUCT VIDEO



## Drain Bung Tool for AdBlue® Tank HGV 26mm 7719

- For draining AdBlue® tanks on HGV found on Volvo/Scania and others. The bung can also be found on some AdBlue® drums.

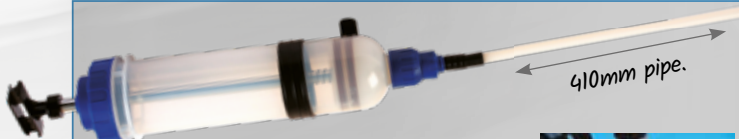

## Extractor AdBlue® 1.5L 6153

Syringe fitted with a shut off valve and extension pipe, to allow safe transfer of AdBlue® from commercially available containers into a vehicle, as well as to draw off AdBlue® from the vehicles tank when overfilled.

- Twist and turn shut off valve to help prevent spillage during fluid transfer.



## AdBlue® Straight & Angled Quick Connectors

- Constant running pressure: 7 bar (101psi); max pressure: 9 bar (130psi). Operating temperature: -40°C to 70°C.
- Body manufactured from nylon PA12; O-ring from EPDM seal. Made to SAE J2044-2009 standards. Red tab for AdBlue® identification.



| Code  | Description                                      |
|-------|--|
| 34226 | Assorted Straight & Angled Quick Connectors 18pc |
| 34227 | Assorted Straight Quick Connectors 15pc          |
| 34228 | Assorted 90° AdBlue® Quick Connectors 15pc       |



## Electric Drum Pump for AdBlue® AC/DC 7229

Battery  
or mains  
powered

Fits 205L (45 gallon) drums and IBC tanks, where the access hole is bigger than 55mm diameter.

- Dual power: mains or 12 volt, giving a flow rate of 19L/min (5 gallons (USA)/min).
- Drum fitting 2" BSP.
- Supplied with 2m hose and swivel dispensing nozzle (ISO 22241 compliant).



## Flow Meter for AdBlue® 7143

A digital flow meter, providing accurate measurement of the AdBlue® fill rate.

- Measures the flow between 10L - 90L per minute.
- Thread size 1" BSP.



## Lever Action Pump AdBlue® 7145

Lever action pump specifically for use with AdBlue®. Fits 200L drums or barrels, or 1000L IBC tank.

- Also suitable for water, lubricants, antifreeze, windshield washer fluid or mild detergents.
- Smooth lever action pump flow rate of 500cc's per stroke / 20L per minute.



## Lever Pump Thread Adaptors 2pc 7621

Converts the 2" BSP thread on the pump to the drum thread.



## Assorted Fuel & Pipe Connector Kit 37199

Developed to allow the replacement or repair of the most common sizes of hard plastic fuel pipe and connectors found on modern vehicles.

The kit contains 10 different size male pipe connectors and female quick connectors in straight and angled formats, as well as lengths of the relevant plastic pipe.

- Pipe cutter and connectors plus twin ear clips are also included.
- Includes pipe connector insertion tool to ease the fitting of the hard plastic fuel pipe to the connectors.
- 3 sizes of nylon pipes in 3 ID: 6, 8 and 10mm x 340mm long. 2 sizes of rubber hoses in 2 ID: 7.5 and 12mm x 200mm long.



### PRODUCT VIDEO





# Wheel & Axle

Kit includes interchangeable adapters for maximum access flexibility.



## Wheel Stud Service Kit for HGV

8125

HGV wheel stud service kit, designed for fast and effective removal and installation of wheel studs on most disc and drum applications.

- For use on inboard hubs on HGV trucks and buses (disc or drum brakes).
- Removal of the hub is not required, which removes the risk of damage to hubs, seals, wheel bearings & wheel studs.



## Wheel Axle Oil Drain 3L

5722

An axle/wheel oil catch pan specifically for wheel axles on commercial vehicles; 3 litre capacity, black PE plastic construction.

- Complete with pouring lip.

## Extra Deep Wheel Nut Sockets 3/4"D

- Single hex, 400mm extra long wheel nut socket allows greater access on HGV & light commercial vehicles.
- Manufactured from Chrome Molybdenum with black phosphate finish.
- Range of 6 popular sizes 24mm - 36mm.



| Code | Size |
|------|------|
| 6213 | 24mm |
| 6214 | 27mm |
| 6215 | 30mm |
| 6216 | 32mm |
| 6217 | 33mm |
| 6218 | 36mm |



## Budd Wheel Nut Socket

1"D

Designed for rear axle wheels on imported trucks. The inner wheel mounts via a square-drive stud on the hub, while the outer wheel is secured to the inner wheel with a standard wheel nut.

- Length: 99mm; Hex profile.

1"

| Code | Size        |
|------|-------------|
| 7246 | 20mm x 38mm |
| 7247 | 21mm x 41mm |

## Clutch & Flywheel Jack

7249


Clutch jack for flywheel removal and installation, designed to remove, install and transport (in the lowered position) 14" and 15½" double-disc clutches and/or flywheel assemblies as fitted to HGV vehicles.

- The low profile of the jack & assembled clutch and the four smooth-action castors make it easy to move into position under the vehicle.
- Capacity 136kgs (300lbs); min. height: 288mm; max. height: 980mm; weight: 60kgs.
- 360° rotating pump handle for precise alignment; 4 swivel castors for easy of use.



Low profile for easier access

Tilt saddle enables the clutch to be positioned horizontally or vertically.

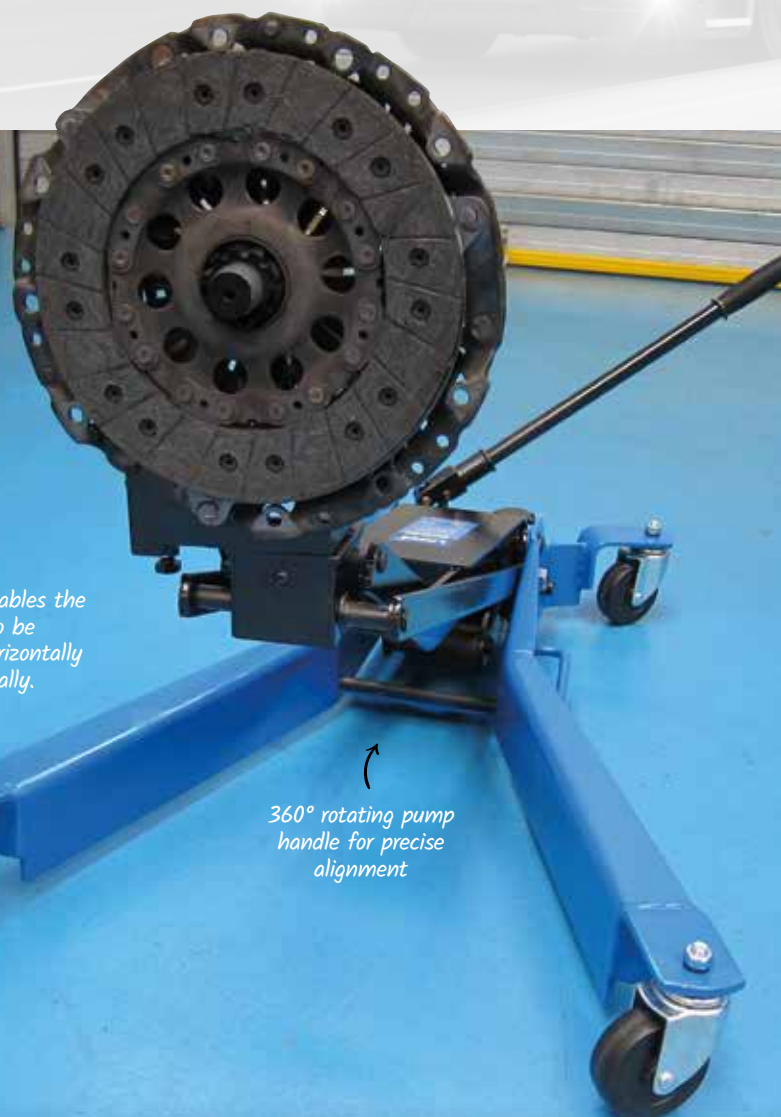

360° rotating pump handle for precise alignment



# Large Size Impact Quality Hub Locknut Sockets For Trailer Axles

## Wheel & Axle

### Hub Nut Socket

1"D 85mm Bi-Hex - Iveco

**9135**

An 85mm impact socket designed specifically to remove the hub nut on Iveco axles requiring a 12-point (Bi-Hex) socket.

- 1"D x 85mm (across flats), external height: 58mm, internal depth: 25mm, external diameter: 107mm.



### Hub Nut Socket

1"D 115mm - for DAF, Volvo

**8350**

A 6 sided, 115mm hub nut socket designed for use on the rear hub nuts of DAF CF-XF and Volvo FH vehicles fitted with rear disc brakes.

- Chrome molybdenum with black phosphate finish.



### Rear Hubcap Socket

8-Sided 120mm BPW

**8730**

Designed specifically to remove the rear hub nut cover on BPW axles requiring an 8 sided socket. BPW axles are used across a wide range of HGV trucks, trailers and buses.

- Equivalent to OEM 03.339.05.07.0 & 03.339.05.02.0. 0.



### Rear Wheel Socket

1"D 120mm - BPW trailer

**7507**

- Application: BPW 13-14 tonne trailer (from November 2004).



### Axle Nut Cover Socket

for SAF

**7526**

8 sided axle nut cover socket for SAF trailer axles.

- 130mm across the flats, 8 point socket.



### Rear Wheel Trailer Socket

1"D 83mm

**7555**

An impact quality hub locknut socket for trailer axles on ROR Meritor; 1" drive.

- Application: ROR trailer rear wheel nut with Meritor axle
- 8 sided socket x 83mm (OD: 103mm, H 74mm)

### Hub Cover Socket

8 sided 85mm

**7675**

8 sided, 85mm hub nut socket designed for Scania hubs.

- Applications: Scania Hub Cover Nut Socket.
- 85mm across flats, 8 sided.
- Impact quality; power tool safe.



### Wheel Locating Guide Set

**8296**

Designed to aid with the refitting of wheels on to cars and vans. It contains 7 pairs of threaded locating pins which can be screwed into the wheel hub in place of the wheel bolt or nut, this then allows for the vehicle wheel to be guided down the pins and into the correct position on the hub before the wheel bolts or nuts are used to secure the wheel in place.

- Male threads: M12 x 1.25, M12 x 1.5, M12 x 1.75, M14 x 1.25, M14 x 1.5, M16 x 1.5.
- Female thread: M12 x 1.5.

### Trailer Axle Hubcap Spanners 3/4"D - BPW

Designed to allow the rear wheel bearing caps to be removed using a mallet or 3/4"D socketry. The addition of the 3/4" square drive allows for the use of a torque wrench when refitting the hubcap. Ideal for road side work where air tools may not be available.

| Code        | Drive | Size  | Applications  |
|-------------|-------|-------|---|
| <b>8811</b> | 3/4"D | 120mm | EH (13 to 16 Tonne), H (14 to 18 Tonne), K, N & Z (13 Tonnes) |
| <b>8812</b> | 3/4"D | 110mm | H, K, N (12 Tonne)  |
| <b>8813</b> | 3/4"D | 120mm | H (13 to 14 Tonne), k (13 to 14 Tonne from 2004               |





# Best Sellers

## Breakback Torque Wrench

3/4"D 200-800Nm

8876

An industrial 3/4"D breakback torque wrench, with a range of 200 to 800Nm (150 to 600lb-ft) and a push-thru drive allowing it to torque in both clockwise and anti-clockwise directions. The breakback mechanism gives the user a clear indication that the required torque has been reached, by pivoting back at the joint, helping to prevent over-torquing.

- 36 teeth ratchet mechanism; 3/4"D x 1330mm long.

3/4"



PRODUCT VIDEO



## Self-Adjusting Oil Filter Pliers

60 - 120mm

8786

A pair of self-adjusting oil filter pliers featuring a 30° offset for greater access and ease of use, with the spring-loaded jaws allowing for one-handed use.

- Serrated jaws for additional grip on oily surfaces.

PRODUCT VIDEO



## Rapid Adjustment

Water Pump Pliers 250mm

8479

Featuring a push-button mechanism with adjustable set positions.

- Range: 0 – 50mm.
- Adjustable serrated jaws, with push button locking function for rapid adjustment and 16 positions.
- Manufactured from high carbon steel, with sand dipped handles for improved grip.

Quick and easy one handed adjustment



PRODUCT VIDEO



Super flexible files

PRODUCT VIDEO



## Ultra Thin Flexible Diamond Coated Files 3pc

8644

Ideal for cleaning and removing corrosion from electrical connectors, terminals and contacts.

- Blade widths: 6, 9, 15mm; length: 83mm; total length: 193mm.

## HGV Trailer Connector Removal Kit - for Knorr-Bremse

8810

A HGV trailer connector removal tool kit, designed for the quick release of the electronic connectors on Knorr-Bremse EBS modules without causing any damage.

- Set of 3 tools for the quick release of HGV trailer electronic connectors on the EBS module (power supply & wheel speed sensors etc).
- Applications include: Bayonet nut on power connector, 2/4/6/12 pole sensor connectors.



PRODUCT VIDEO



5 018341 627973 >



The Tool Connection Ltd.

Kinton Road | Southam | Warwickshire  
CV47 ODR | Tel: 01926 815000

Promotion valid from 1st July - 31st October 2025 while stocks last.  
All products available through your local supplier of The Tool Connection Ltd branded products. All prices correct at the time of going to press and exclude VAT. The Tool Connection Ltd reserve the right to change prices or take products off of promotion without prior notice.